



**TENV** Totally Enclosed non ventilated, with terminal box. **HP 1/3 ÷ 2**  
 Totalmente chiuso non ventilato, con morsetti. **HP 1/3 ÷ 2**

**Standard** terminal box with cable gland in **radial** position

Standard morsetti con pressacavo in posizione radiale.

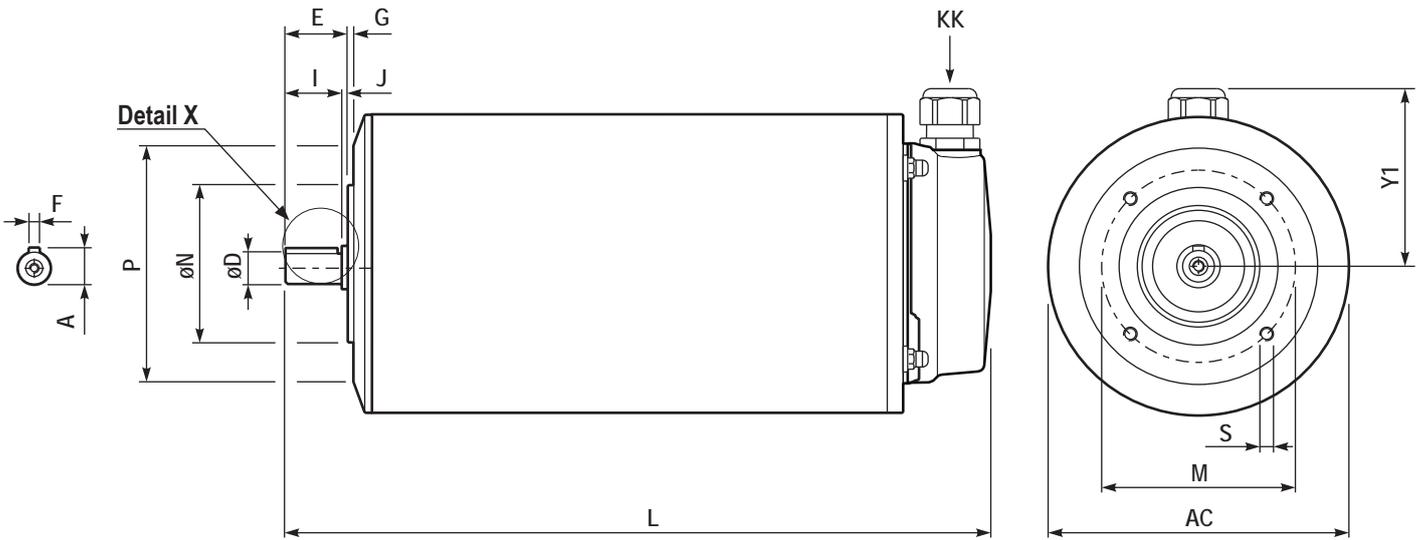

**Detail X**  
Only for 143/5TC

### Dimensions

Dimensioni

Motor	4 poles HP	A	$\varnothing D$	E	G	I	J	F	L	M	$\varnothing N$	P	S	AC	KK	Y1
56C	1/3								13.252							
	1/2															
	3/4	0.702	<b>0.625</b>	1.933	0.126	1.874	0.06									
	1								0.187	5.874	4.5	6.5	3/8-16 UNC x 0.67	7.13	M20 x 1.5	3.82
	1 1/2															
2																
143TC	1								13.48							
145TC	1 1/2	0.925	<b>0.875</b>	1.992	0.126	2.248	0.26									
	2															

# APM series Aluminum premium motors

Motori elettrici in alluminio



# C-Face

Dimensions

**TENV** Totally Enclosed non ventilated, with direct cable. **HP 1/3 ÷ 2**  
 Totalmente chiuso non ventilato, con cavo diretto.

**On request** direct cable with cable gland in **axial** position

A richiesta cavo diretto con pressacavo in posizione assiale

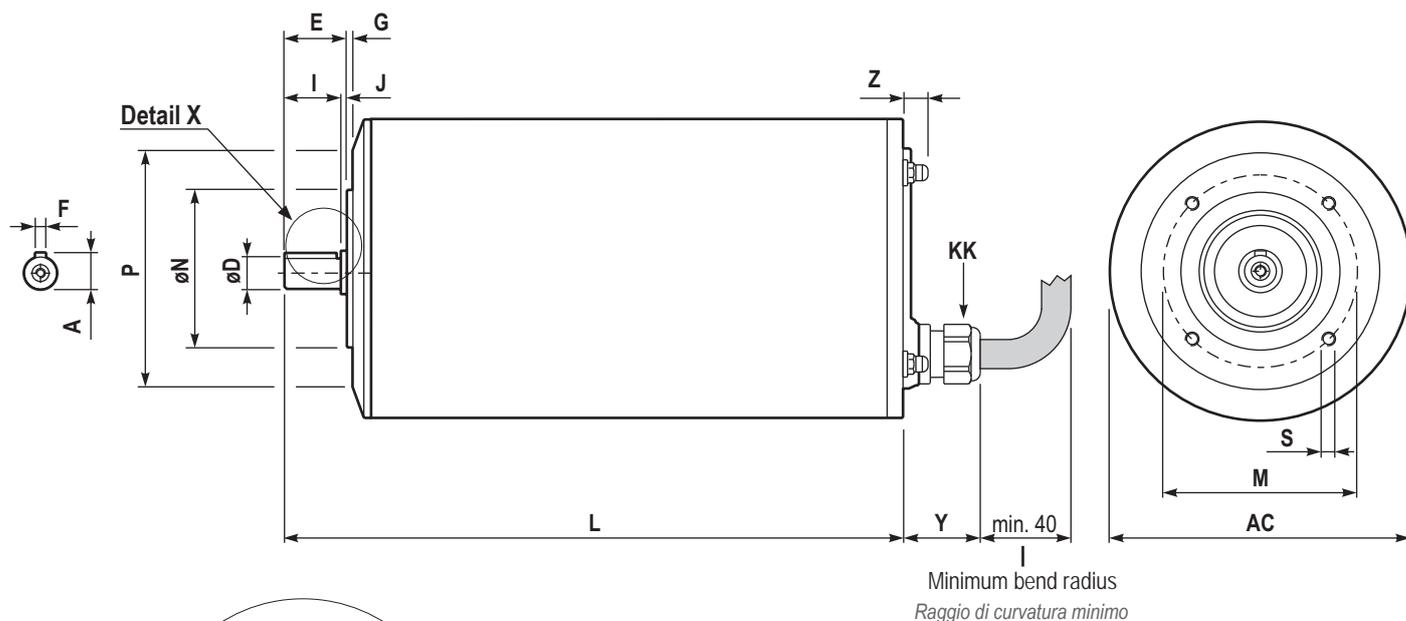

**Detail X**  
Only for 143/5TC

## Dimensions

Dimensioni

Motor	4 poles HP	A	øD	E	G	I	J	F	L	M	øN	P	S	AC	KK	Y	Z
56C	1/3																
	1/2								11.736								
	3/4																
	1	0.702	0.625	1.933	0.126	1.874	0.06										
	1 1/2 2							0.187		5.874	4.5	6.5	3/8-16 UNC x 0.67	7.18	M20 x 1.5	1.38	0.43
143TC	1								13.945								
145TC	1 1/2	0.925	0.875	1.992	0.126	2.248	0.26										
	2																