


TENV Totally Enclosed non ventilated, with terminal box. **kW 0.12÷2.2**
 Totalmente chiuso non ventilato, con morsettiera.

Standard terminal box with cable gland in **radial** position

Standard morsettiera con pressacavo in posizione radiale.

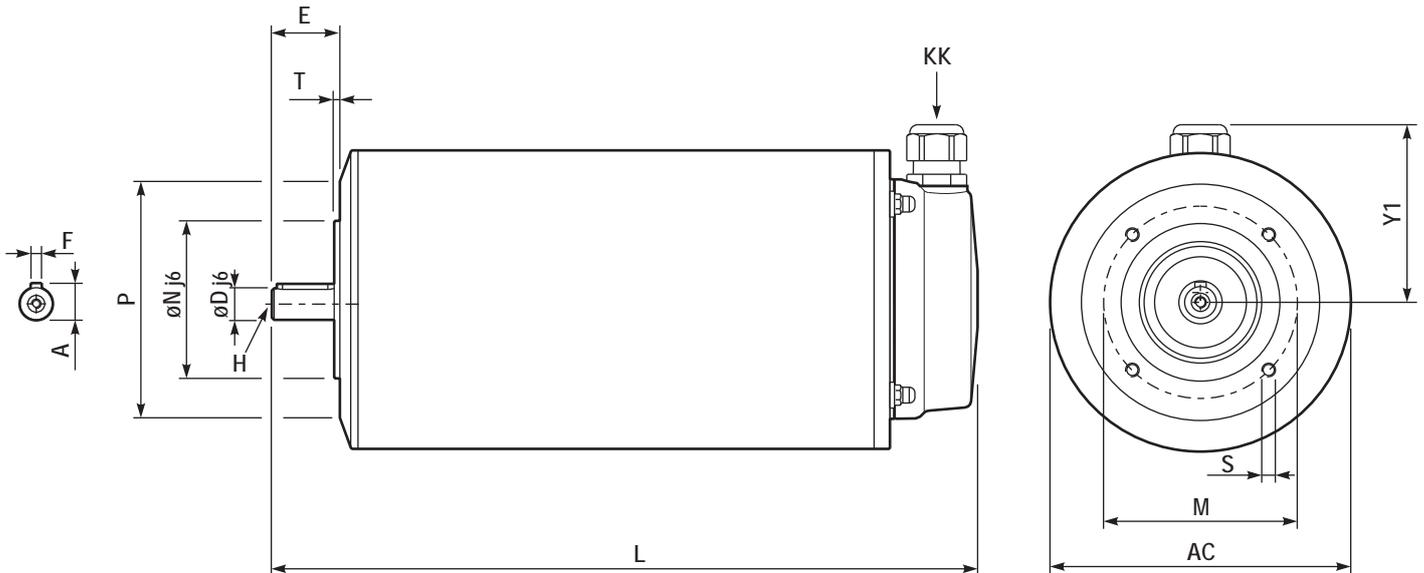

Dimensions

Dimensioni

Motor	2 poles kW	4 poles kW	6 poles kW	A	$\delta D j_6$ H	E	F	L	M	$\delta N j_6$	P	S	T	AC	KK	Y1
63A	0.18	0.12	-	12.5	$\delta 11$	23	4	264	75	60	90	M5x14	2.5	133	M20x1.5	78
63B	0.25	0.18	-	12.5	$\delta 11$ M4x11	23	4	264	75	60	90	M5x14	2.5	133	M20x1.5	78
71A	0.37	0.25	0.18	16	$\delta 14$	30	5	311	85	70	105	M6x15	2.5	133	M20x1.5	78
71B	0.55	0.37	0.25	16	$\delta 14$ M5x12	30	5	311	85	70	105	M6x15	2.5	133	M20x1.5	78
80A	0.75	0.55	0.37	21.5	$\delta 19$	40	6	350.5	100	80	120	M6x15	3	143	M20x1.5	78
80B	1.1	0.75	0.55	21.5	$\delta 19$ M6x16	40	6	350.5	100	80	120	M6x15	3	143	M20x1.5	78
90S	1.5	1.1	0.75	27	$\delta 24$	50	8	386	115	95	140	M8x20	3	183	M20x1.5	97
90L	2.2	1.5	1.1	27	$\delta 24$ M8x20	50	8	386	115	95	140	M8x20	3	183	M20x1.5	97

APM series Aluminum premium motors

Motori elettrici in alluminio


B14

Dimensions

TENV Totally Enclosed non ventilated, with direct cable. **kW 0.12÷2.2**
 Totalmente chiuso non ventilato, con cavo diretto.

On request direct cable with cable gland in **axial** position

A richiesta con cavo diretto e pressacavo in posizione assiale

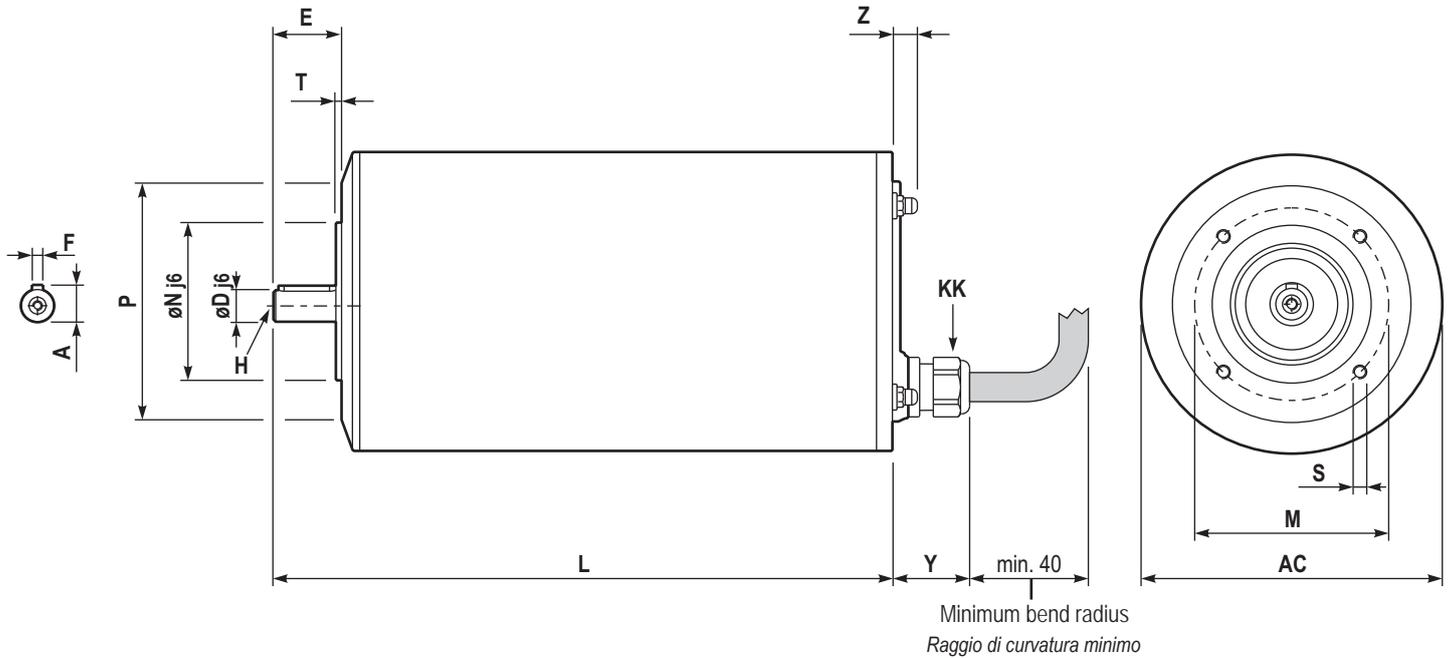

Dimensions

Dimensioni

Motor	2 poles kW	4 poles kW	6 poles kW	A	$\phi D j6$ H	E	F	L	M	$\phi N j6$	P	S	T	AC	KK	Y	Z
63A	0.18	0.12	-	12.5	$\phi 11$	23	4	225.5	75	60	90	M5x14	2.5	133	M20x1.5	35	11
63B	0.25	0.18	-		M4x11												
71A	0.37	0.25	0.18	16	$\phi 14$	30	5	272.5	85	70	105	M6x15	2.5	133	M20x1.5	35	11
71B	0.55	0.37	0.25		M5x12												
80A	0.75	0.55	0.37	21.5	$\phi 19$	40	6	312	100	80	120	M6x15	3	143	M20x1.5	35	11
80B	1.1	0.75	0.55		M6x16												
90S	1.5	1.1	0.75	27	$\phi 24$	50	8	347.5	115	95	140	M8x20	3	183	M20x1.5	35	11
90L	2.2	1.5	1.1		M8x20												